

SPECIFICATION

**300W+300W
48VDC input ATX output**

**Mini
REDUNDANT POWER SUPPLY
HOT-SWAPABLE**

R6300PM-48 RV

Top Microsystems Corp.
3261 Keller Street
Santa Clara, CA 95054 USA

Tel: 1-408-980-9813
Fax: 1-408-980-8626
Email: info@topmicro.com
web site: <http://www.topmicro.com>

- 1.0 General
 - 1.1 Parameter Specifications

- 2.0 Input Characteristics
 - 2.1 Input Voltage
 - 2.2 Input Waveform
 - 2.3 Input Frequency
 - 2.4 Input Current
 - 2.5 In-Rush Current
 - 2.6 Line Regulation
 - 2.7 Input Leakage Current
 - 2.8 Dielectric Withstand Voltage
 - 2.9 Insulation Resistance

- 3.0 Output Characteristics
 - 3.1 DC Output Characteristics
 - 3.2 Overshoot
 - 3.3 Efficiency

- 4.0 Time Sequence
 - 4.1 Hold-Up time
 - 4.2 Power Good Signal
 - 4.3 +5V Volt and Power Good Output Rise Time
 - 4.4 Start-Up Time
 - 4.5 Dynamic Load Response Time

- 5.0 Protection
 - 5.1 Over Power Protection
 - 5.2 Over Voltage Protection
 - 5.3 Short Circuit Protection
 - 5.4 No Load Operation

- 6.0 System Interface Signal
 - 6.1 Power System Fault Signal
 - 6.2 Alarm Beeping Sound

- 7.0 Physical Characteristics
 - 7.1 Size
 - 7.2 Mounting Requirements
 - 7.3 Weight
 - 7.4 Cooling

- 8.0 Connectors
 - 8.1 DC Output Wire List
 - 8.2 AC Input

- 9.0 Environmental

- 9.1 Temperature
- 9.2 Relative Humidity
- 9.3 Altitude
- 9.4 Shock
- 9.5 Vibration
- 9.6 Power Line Transient
- 9.7 Acoustic Noise

- 10.0 Regulatory Agency Certification
- 10.1 RFI/EMI Standards
- 10.2 Safety Standards

- 11.0 Reliability

1.0 General

This specification describes the physical, functional and electrical Characteristics of a redundancy 300+300 watts. 6-output, fan-cooled switching power supply.

1.1 Parameter Specification

Unless specification otherwise, all parameters must be met over the limits of temperature, load and input voltage.

2.0 Input Characteristics**2.1 Input Voltage**

Normal	Minimum	Maximum
-48Vdc	-38Vdc	-72Vdc

2.2 Input Waveform

The unit is capable of operating with 1 10% distorted sinewave input as measured by a distortion analyzer. Its flattopping clipped 10% from the peak value of standard sinewave.

2.3 Input Frequency: N/A**2.4 Input current 11.0A (One Power Supply)****2.5 In-Rush Current**CONDITION

72Vdc, Full load
Turn off 1 sec; turn on at
peak of input voltage cycle.
25 Air Ambient cold start.

LIMITS

No damage shall occur or
components over stressed,
Input Fuse shall not blow.

2.6 Line RegulationCONDITION

Full Load
38-72 Vdc input

LIMITS

%1

2.7 Input Leakage Current

Input leakage current from line to frame ground will be less than 3.5mA rms.
Condition: 72Vdc

2.8 Dielectric Withstand Voltage

Primary to Secondary : 1500Vrms/50Hz for 1 Minute.

Primary to Safety Ground : 1500Vrms/50Hz for 1 Minute.

Also isolation transformers will have been tested prior to assembly into a power supply units. Any such transformers without a grounded shield will be tested to 1500 Vrms.

2.9 Insulation Resistance

Primary to Safety Ground : 500Vdc,50Mohms Minmum.

3.0 Output Characteristics**3.1 DC Output Characteristics**

To be met under all combinations of loading.

Output voltage	V1 +5V	V2 +3.3	V3 +12	V4 -5	V5 -12	Vsb +5
Max.Load	30A	22A	11A	1A	1A	1.5A
Min Load	4A	0.3A	0.5A	0A	0A	0A
Load Reg. %	+/-5%	+/-5%	+/-5%	+/-10%	+/-10%	+/-5%
Cross Reg %	+/-5%	+/-5%	+/-5%	+/-10%	+/-10%	+/-5%
Line Reg. %	+/-1%	+/-1%	+/-1%	+/-1%	+/-1%	+/-1%
Ripple %	+/-1%	+/-1%	+/-1%	+/-2%	+/-2%	+/-1%
Noise %	+/-1%	+/-1%	+/-1%	+/-2%	+/-2%	+/-1%

Note1: The +12Volt output of the power supply must be capable of 16Amps peak for 10 seconds. A +/-10% tolerance is permissible. Output voltage is measured at the load and of the output cable.

Note2: Noise bandwidth is from DC to 20MHz. Add 0.1uF/10uF Capacitor at output connector terminals for Ripple And Noise measurement.

Note3: Regulation tolerance shall include temperature change,warm up drift and dynamic load.

3.2 Overshoot

Any output overshoot at TURN-ON shall not exceed 10% (+5V/+12V output) and 10%(-5V/-12V output) of nominal voltage value.

3.3 Efficiency**4.0 Time Sequence****4.1 Hold-Up Time**

Unit shall continue to supply regulated DC outputs and power good signal for at least 16 Milliseconds st 48Vdc full load after a loss of DC input voltage which shall be represented by a short circuit at the DC input. See Fiture2.

4.2 Power Good Signal

When the power supply is turned off a minimum of 1.0 second and turned on, the power-good signal as described below will be generated.

The power supply shall provide a power-good signal to indicate proper operation of the power supply. This signal shall be a TTL compatible high level for normal operation; low level for fault conditions.

Power-good shall go to low level at least 1 ms before the +5V output voltage falls below the regulation limits described in 3.1 DC output Characteristics.

The operation point used as a reference for measuring the 1ms shall be minimum line voltage and maximum load.

All waveform transitions shall be smooth and monotony, i.e. no oscillations. The power-good signal shall stay low (during POWER-ON) until all output voltages are delay greater than 100ms but less than 500ms. See Figure 2.

4.2.1 Fanout

Power Good output circuit shall consist of an active pull down component and a passive pull up resistor.

Power-Good output voltage to be met under recommended loading conditions.

<u>CONDITION</u>	<u>LIMITS</u>
I _{OH} =-140uA Min.	V _{OH} =2.7V Min..
I _{OL} =2.8mA Min.	V _{OL} =0.4V Min.


4.3 +5V Volt and Power Good Output Rise Time

4.3.1 +5 Volt Output Rise Time

The +5V output shall have a turn-on rise time of less than 100ms under all load conditions. Rise time is measured between 0.0 and 4.75V.

The +5V output shall not vary from a smooth curve by more than 0.5V_{p-p} during turn-on and turn-off.

4.3.2. Power Good Output Rise

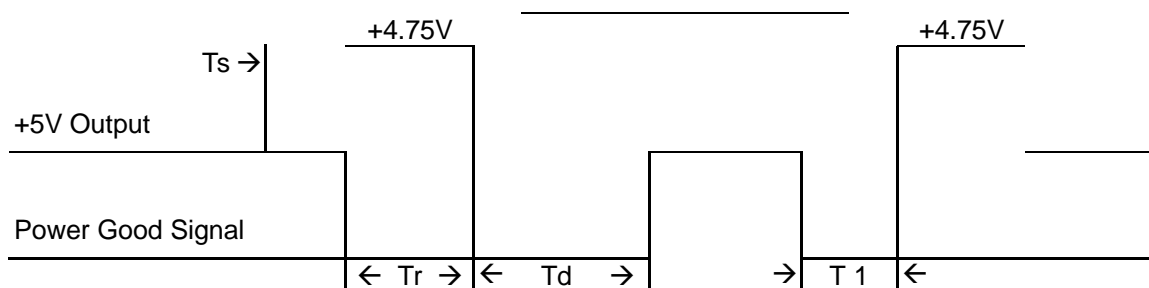

Note: Tr ≤ 100 ms, T1 ≥ 1 ms, Td = 100 - 500 ms.

4.4 Start-Up timing

All output shall be stable and in regulation in less than 2.0 second under all

load and line condition. Start-up time is measured between the DC turn-on and 4.75V on +5V. See Figure 2.

4.5 Dynamic Load Response Time

Transient response is measured by switching the output load from 80 to 100 to 80 percent of its full value at a frequency of 100Hz and 50% duty cycle, step load change is 0.5A/us, The magnitude V_r is less than +/-5% of +5V and +12V output, the recovery time T_r is less than 1mS. See Figure3.

5.0 Protection

5.1 Over Power Protection

This power supply shut down all DC output when outputs are overloaded to the limit. The power supply logic shall latch into the off state requiring a power on cycle to be performed by the operator. The power supply will turn-off within 20ms of the occurrence of the overload.

CONDITION

Nominal input

LIMITS

When output power is over to 120%

5.2 Over Voltage Protection

The power supply shall latch off if the +5VDC or +12VDC or +3.3VDC maximum voltage exceeds the limits shown. The DC must be recycled to restart.

5.2.1 +5VDC

CONDITION

All operating

LIMITS

Max.6.8Vdc

5.2.2 +3.3VDC

CONDITION

All operating

LIMITS

Max.4.30Vdc

5.2.3 +12VDC

CONDITION

All operating

LIMITS

Max.15Vdc

5.3 Short Circuit Protection

A short circuit placed on any output shall cause no damage to this unit. The power supply shall be shut down.

5.4 No Load Operation

When primary power is applied, with no load on any output voltage, no damage or hazardous condition shall occur. In such a case, the power supply shall power up and stabilize.

6.0 System Interface Signal

6.1 Power System Fault Signal

The Hot-Swap Redundant Power Supply shall give fault signal(an open collector) that will indicate the status of the power supply operation.

If one of the power supply unit shut down, the power fault signal could be generated. This signal shall be high level for normal operation; Low level for fault conditions.

6.2 Alarm Beeping Sound

The alarm system monitors the power supply failure and provides alarm to indicate the status of the power supply. By checking the LED on the power supply, end users will be able to locate the defective power unit.The alarm system will give a beeping sound to indicate the power supply failure until that particular power unit is replaced.

Beeping sound could be suspended before the failure power supply unit replaced.

7.0 Physical Characteristics

7.1 Size

See Figure1

7.2 Mounting Requirements

See Figure1

7.3 Weight

12.8 pounds

7.4 Cooling

Fans: NIDEC { D08T-12PG (ME) }

8.0 Connections

8.1 DC Output Wire List

<u>Connector</u>	<u>Output</u>	<u>Wire Color</u>	<u>Wire Size</u>
P1-1	+3.3V	Brown	18 AWG
P1-1-1	+3.3V Sense	Brown	22 AWG
P1-2	+3.3V	Brown	18 AWG
P1-3	COM	Black	18 AWG
P1-4	+5V	Red	18 AWG
P1-5	COM	Black	18 AWG
P1-6	+5V	Red	18 AWG
P1-7	COM	Block	18 AWG

P1-8	POK	Orange	22 AWG
P1-9	+5VSB	Purple	22 AWG
P1-10	+12V	Yellow	18 AWG
P1-11	+3.3V	Brown	18 AWG
P1-12	-12V	Blue	20 AWG
P1-13	COM	Black	18 AWG
P1-14	PS-ON	Green	20 AWG
P1-15	COM	Black	18 AWG
P1-16	COM	Black	18 AWG
P1-17	COM	Black	18 AWG
P1-18	-5V	White	20 AWG
P1-19	+5V	Red	18 AWG
P1-20	+5V	Red	18 AWG

<u>Connector</u>	<u>Output</u>	<u>Wire Color</u>	<u>Wire Size</u>
P2~P8-1	+12V	Yellow	18 AWG
P2~P8-2	COM	Black	18 AWG
P2~P8-3	COM	Black	18 AWG
P2~P8-4	+5V	Red	18 AWG

<u>Connector</u>	<u>Output</u>	<u>Wire Color</u>	<u>Wire Size</u>
P9-1	+12V	Yellow	20 AWG
P9-2	COM	Black	20 AWG
P9-3	COM	Black	20 AWG
P9-4	+5V	Red	20 AWG

8.2 DC Input Terminal Block 3PIN.

9.0 Environmental

9.1 Temperature

9.1.1 Operating

50 to 122 (10 to 50). Derates linearly to 50% at 70

9.1.2 Non-Operating

-4.0 to 140 (-20 to 60)

9.2 Relative Humidity

9.2.1 Operating

20 to 90 % non-condensing at 104 (40).

9.2.2 Non-Operating

5 to 95 % non-condensing at 122 (50)

9.3 Altitude**9.3.1 Operating**

Sea level to 10,000feet.

9.3.2 Non-Operating

Sea Level to 40,000 feet.

9.4 Shock**9.4.1 Operating**

The power supply shall exhibit no signs of damage or degradation of performance when subjected to a shock of 5g's for 11 ms,with 1 1/2 sine wave for each of the perpendicular axes X,Y and Z.

9.4.2 Non-Operating

The power supply shall exhibit no signs of damage or degradation of performance when subjected to a shock of 30g's for 11 ms,with 1 1/2 sine wave for each of the perpendicular axes X,Y and Z.

9.5 Vibration**9.5.1 Opeating**

The power supply shall be subjected to a vibration test consisting of a 10 to 500Hz sweep at a constant acceleration of 0.5g for a duration of one (1) Hour for each of the perpendicular axes X,Y and Z.
The output voltage shall remain within specification.

9.5.2 Non-Opeating

The power supply shall be subjected to a vibration test consisting of a 10 to 300Hz sweep at a constant acceleration of 2.0g for a duration of one (1) Hour for each of the perpendicular axes X,Y and Z.
The power supply shall not incur physical damage or degradation of any characteristics below the performance specifications.

9.6 Power Line Transient**9.6.1 Drop out**

With a full cycle input voltage drop-out at 50 Hz,the shall operating whitin the prescribed voltages whit a drop-out cycle repetition rate of 500ms.

CONDITIONS

LIMITS

Full load,Nom.Input DC Voltage Meet all requirements

9.6.2 Transient Voltage Spikes

The unit shall meet the following standards,The IEEE Standard 587-1980 for surge withstand capability under categories A and B. The crest value of the first half peak of the injected Ringwave(0.5/10us) Biwave (1.2/50us) will be 3k volts open circuit and 3KA(8us X 20us) short circuit.

IEC 801-2 (ESD) to a level of 8KV contact,and 15K air discharge without causing the device(s) to fail the test.

IEC 801-4 (EFT) on the power lines and all I/O cables to a level of 2.5KV Without causing the Device(s) to fail the test.

IEC 801-5 Surge immunity measurement on the input power source of 2.5KV. All output shall be stable and in regulation.

9.7 Acoustic Noise

The power supply shall be tested in accordance with the ANSIS12.10-1985 standard specification.The “A” weighted overall sound pressure level as well as individual octave band levels from 63Hz to 16,000Hz is measured with the noise meter placed 1 meter from the nearest vertical surface of center of fan installed in power supply.

CONDITION

-48Vdc Input, full load of +5V
0.5A of +12V

LIMITS

Acoustic noise is 40db maximum

Octave Band Center Frequency(Hz)								A-Weighted
125	250	500	1k	2k	4k	8k	16k	Max.sum
20	36	42	42	42	36	30	20	40DbA

10.0 Regulatory Agency Certification

10.1 RFI/EMI Standards

TBD

10.2 Safety Standard

The power suply shall be meet with the following safety standards,

- (1) UL 1950(Information Processing/Business equipment).
- (2) CUL
- (3) TUV Certification to IEC950 1 edition with Amendment#1,#2,and EN60950