

EPS 2U IPC

P6480H 2F

Features

- EPS 2U OR ATX12V compliant
- Active PFC (Power Factor Correction)
- Remote on/off sensing, Power good TTL Signal
- Short Circuit, Over Current & Voltage Protection
- High Efficiency

Apply for

- All Intel Processors upto Dual Xeon P4
- All AMD Processors upto Dual Athlon

Environmental Specification

- Operating / Storage Temp 0 ~ 50°C / -20 ~ 60°C
- Relative Humidity 5 ~ 95%
- Operating / Storage Altitude 10,000 / 50,000 FT
- MTBF 100,000 HRS
- Safety Approvals UL/CUL, CB, TUV,
- EMC Regulations FCC, CE

Electrical Specifications

- Input Voltage 115 - 230VAC
- Frequency Full range 47 ~ 63 Hz
- Input Current 7A @ 115VAC
4A @ 230VAC
- Hold up time 16ms@ full load


Output Specification

| Voltage | Regulator | Minimum Load | Maximum Load | Peak Load |
|---------|-----------|--------------|--------------|-----------|
| +3.3V | +/- 5% | 0.5A | 22A | -- |
| +5V | +/- 5% | 7.0A | 20A | -- |
| +12V1 | +/- 5% | 2.0A | 15A | 18A |
| +12V2 | +/- 5% | 2.0A | 15A | 18A |
| -5V | +/- 10% | 0A | 0.5A | -- |
| -12V | +/- 10% | 0A | 1.0A | -- |
| +5Vsb | +/- 5% | 0.1A | 2.0A | -- |

* 3.3V & 5V combine load 150W



Mechanical Drawing

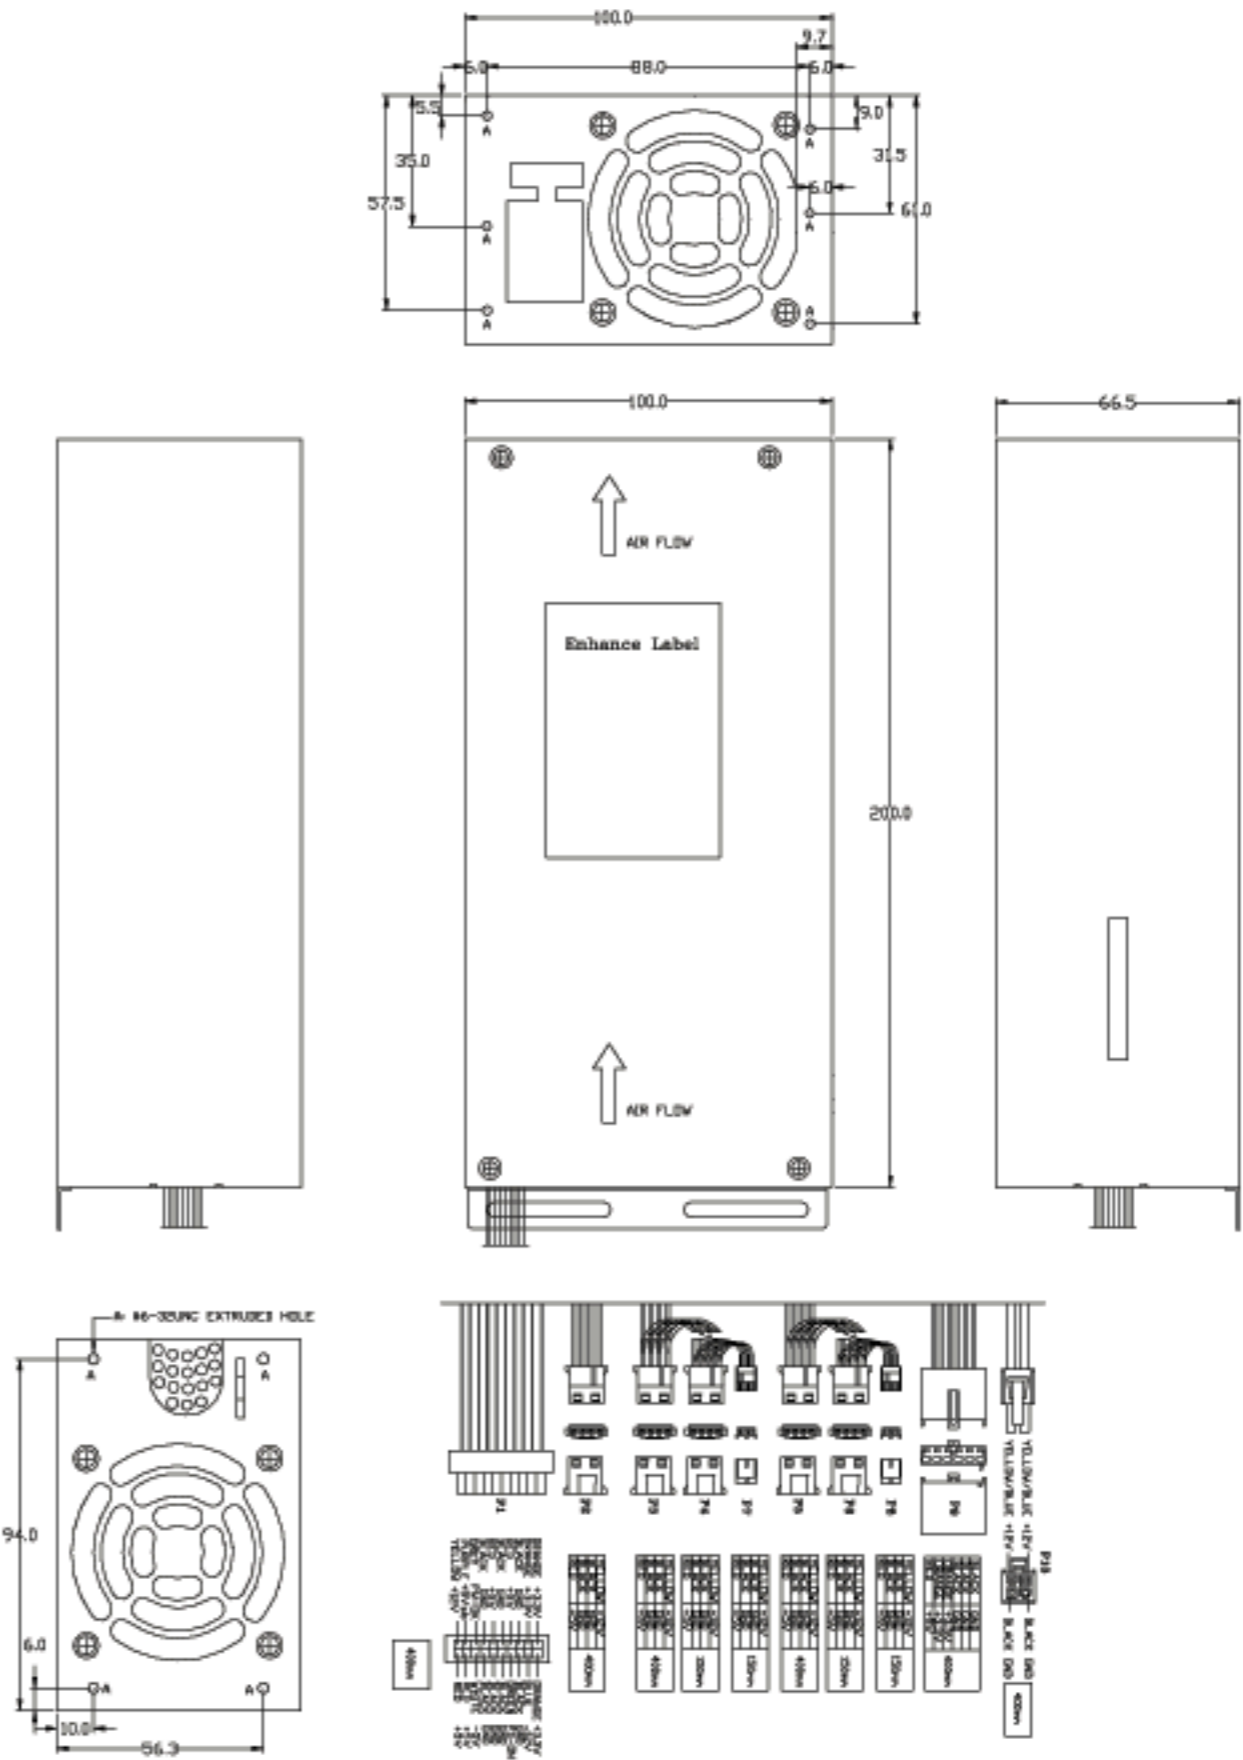

Dimension (W x L x H) : 200 x 100 x 70 mm